

PROPERTY SURVEY FOR
**MONT & RHONDA WILSON
AND
VICKIE WILSON**
SECTION 32, TOWNSHIP 1 NORTH, RANGE 8 WEST
UINTAH SPECIAL BASE AND MERIDIAN

THIS SURVEY WAS PERFORMED USING GLOBAL POSITIONING SYSTEM (G.P.S.)
PROCEDURES AND EQUIPMENT.

DESCRIPTION OF VICKIE'S PARCEL

Beginning at the Northeast Corner of Section 32, Township 1 North, Range 8 West of the Uintah Special Base and Meridian;
Thence South 0°04'18" West 16.00 feet along the East line of the NE1/4 of said Section;
Thence North 89°58'42" West 630.43 feet, parallel with the North line of said NE1/4;
Thence South 0°04'18" West 1299.14 feet, parallel with said East line to the South line of the NE1/4 of said NE1/4;
Thence North 89°50'41" West 688.62 feet to the Southwest Corner of said NE1/4 of said NE1/4;
Thence North 0°05'47" East 1313.53 feet to the Northwest Corner of said NE1/4 of said NE1/4;
Thence South 89°58'42" East 1318.48 feet to the Point of Beginning, containing 21.00 acres.

DESCRIPTION OF 5-1/4 ACRE PARCEL


Beginning at a point on the East line of the NE1/4 of Section 32, Township 1 North, Range 8 West of the Uintah Special Base and Meridian, said point being South 0°04'18" West 496.81 feet from the Northeast Corner of said Section;
Thence South 0°04'18" West 478.27 feet along said East line;
Thence South 89°09'06" West 478.27 feet;
Thence North 0°04'18" East 478.27 feet parallel with said East line;
Thence North 89°09'06" East 478.27 feet to the Point of Beginning, containing 5.25 acres.

NARRATIVE


This survey was performed at the request of Vickie Wilson and Mont and Rhonda Wilson in order to establish the property lines on a 21 acre parcel. And also to establish a 5.25 acre parcel. The corners around the section used to control the survey are shown on the plat. A 1/2" rebar set by C. Peatross was found near the Northeast Corner of the Section and represented by him as the section corner. However, the position of the rebar did not agree with a 5/8" rebar set by Uintah Engineering at the section corner prior to December 1986 when it was found and used by this surveyor (Allred). The grade of the County Road has been built up over the years and road materials have covered the location of this bar. The U.E. 5/8" rebar was recovered approximately 0.6 feet below the present road surface in the same position it was found in 1986. It was therefore used as the section corner for this survey and the Peatross bar used as a witness mark.

SURVEYOR'S CERTIFICATE

This is to certify that I have surveyed the parcels of land shown on this plat, and that the monuments indicated were found or set during said survey, and that this plat accurately represents said survey to the best of my knowledge.

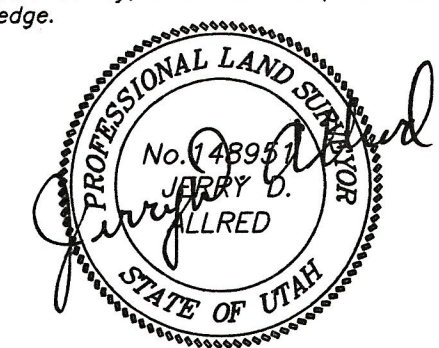

Jerry D. Allred, Professional Land Surveyor,
Certificate No. 148951, (Utah)



JERRY D. ALLRED AND ASSOCIATES
SURVEYING CONSULTANTS
121 NORTH CENTER ST. - P.O. BOX 975
DUCHESSNE, UTAH 84021
(435) 738-5352

24 AUG 2000 00-100-039